ENVIRONMENTAL MONITORING

SEMIANNUAL REPORT

JANUARY 1, 1968 TO JUNE 30, 1968

bу

J. D. MOORE

APPROVED:

Supervisor, Operational Safety Unit

ABSTRACT

Environmental monitoring at Atomics International is performed by the Operational Safety Unit of the Health, Safety, and Radiation Services Department. Soil, vegetation, water, and air are routinely sampled up to a distance of 10 miles from Atomics International property. The environmental radioactivity reported herein is attributed to natural causes and to nuclear weapons testing, rather than to Atomics International operations.

CONTENTS

Abstra	.ct	Page
I.	Summary	. 1
_	A. Environmental Radioactivity Data	• 5
II.	Environmental Monitoring Program	. 8
	A. General Description	. 8
	B. Sampling and Sample Preparation Methods	• 9
	C. Counting and Calibration Procedures	. 17
	TABLES	
I.	Soil Radioactivity Data	• 5
II.	Vegetation Radioactivity Data	• 5
III.	NDFL Process Water Radioactivity Data	. 6
IV.	Bell Creek and Rocketdyne PFL Reservoir Radioactivity Data	. 6
٧.	Chatsworth Reservoir Water Radioactivity Data	• 7
VI.	Airborne Radioactivity Data	• 7
VII.	Sample Station Locations	. 14
VIII.	Minimum Detection Limits	. 17
	FIGURES	
l.	Atomics International Headquarters	. 2
2.	Atomics International Nuclear Development Field Laboratory	• 3
3.	Map of Headquarters and Nuclear Development Field Laboratory Environs	. 1
4.	Map of Canoga Park, Simi Valley, Agoura, and Calabasas Sampling Stations	. 10
5•	Map of Headquarters Vicinity Sampling Stations	. 11
6.	Map of NDFL Sampling Stations	. 12
7.	Map of Chatsworth Reservoir Sampling Stations	. 13
8.	Long-Lived Airborne Radioactivity, Headquarters and NDFL	. 18
a	Sample Self-Absorption Correction Graph	. 20


I. SUMMARY

Atomics International, A Division of North American Rockwell Corporation, has been engaged in atomic energy research and development since 1946. The Company designs, develops, and constructs nuclear reactors for central station and compact power plants and for medical, industrial, and scientific applications.

The Company occupies modern facilities in Canoga Park, California, approximately 23 miles northwest of downtown Los Angeles (Figure 1). The 290-acre Nuclear Development Field Laboratory (Figure 2), equipped with extensive facilities for the support of advanced nuclear studies, is located in the Simi Hills of Ventura County approximately 29 miles northwest of downtown Los Angeles. The location of the above sites in relation to nearby communities is shown in Figure 3.

The basic concept of radiological hazards control at Atomics International requires adequate containment of radioactive materials, and, through rigid operational controls, minimizes effluent releases and external radiation levels. The environmental monitoring program provides a measure of the effectiveness of the Company's radiological safety procedures and of engineering safeguards incorporated into facility designs.

Environmental sampling stations located within the boundaries of Atomics International's sites are referred to as "on-site" stations. The remaining stations, located within a 10-mile radius of the sites, are referred to as "off-site" stations. The on-site environs of Atomics International's Head-quarters and Nuclear Development Field Laboratory (NDFL) facilities are sampled monthly to determine the concentration of radioactivity in typical surface soil, vegetation, and water samples. The off-site environs are also sampled monthly; however, since January, 1966, analysis of off-site soil and vegetation samples has been performed only quarterly. Also, continuous on-site environmental air sampling provides information concerning long-lived airborne particulate radioactivity. This report summarizes environmental monitoring results for the first six months of 1968.

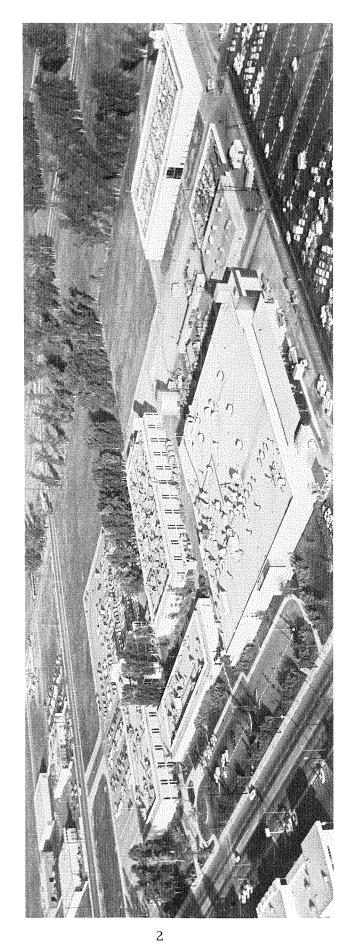

Atomics International Headquarters Figure 1.

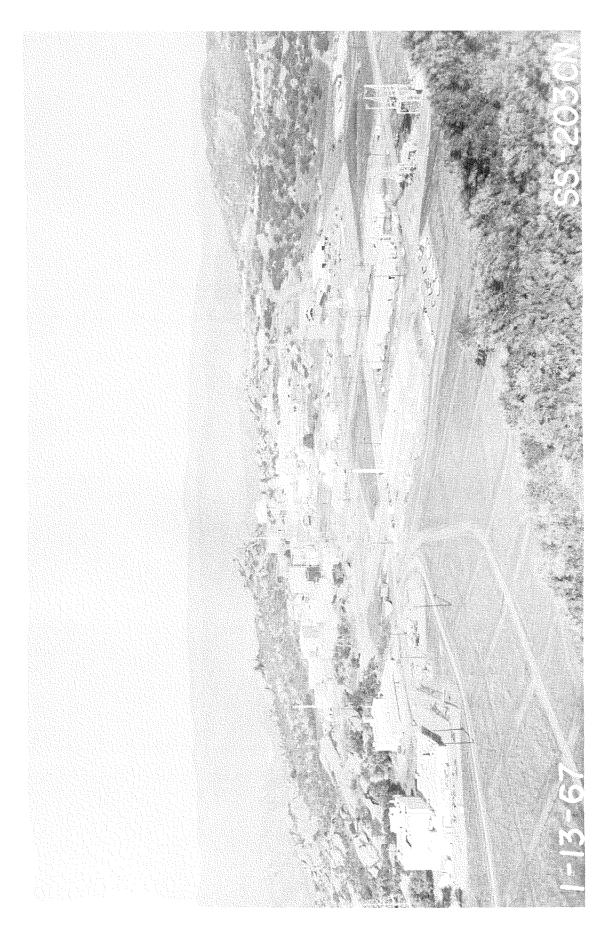


Figure 2. Atomics International Nuclear Development Field Laboratory.

Map of Headquarters and Nuclear Development Field Laboratory Environs. 33 Figure

A. ENVIRONMENTAL RADIOACTIVITY DATA

The average radioactivity concentrations in soil and vegetation samples are presented in Tables I and II.

TABLE I
SOIL RADIOACTIVITY DATA

		1967		First Hal	f - 1968
Area	Activity	No. Samples	Average pCi/gram	No. Samples	Average pCi/gram
On	α	1 2424	0.41 to 0.42	72	0.47
Site	βγ	144	28	72	25
Off	α	48	0.38 to 0.39	24	0.50
Site	βΥ	48	24	24	25

TABLE II

VEGETATION RADIOACTIVITY DATA

		1.9	967	First Hal	f - 1968
		Average			Average
Area	Activity	No. Samples	pCi/gram-ash	No. Samples	pCi/gram-ash
On	α	144	0.61 to 0.62	72	0.55
Site	βγ	144	286	72	177
Off	α	48	0.38 to 0.39	24	0.55
Site	βΥ	48	413	24	273

Process water used at the NDFL is obtained from Ventura County Water District No. 10 and distributed on-site by the same piping system previously used when process water was supplied by on-site wells. Pressure is provided by elevated storage tanks, one 50,000-gallon and one 500,000-gallon tank on-site. While clinically potable, the water is not used for drinking. Bottled potable water is delivered by a vendor and is not analyzed. Water from the pipe system is sampled monthly at two locations. The average process water radioactivity concentration is presented in Table III.

TABLE III

NDFL PROCESS WATER RADIOACTIVITY DATA

		1967		First Hali	? - 1968
Location	Activity	No. Samples	Average pCi/liter	No. Samples	Average pCi/liter
	α	24	0.12 to 0.13	12	0.18
NDFL	βΥ	24	6.1	12	4.9

Surface discharged waters from NDFL facilities drain into holding reservoirs on Rocketdyne PFL property. When full, the main reservoir is drained into Bell Creek, a tributary of the Los Angeles River in the San Fernando Valley, Los Angeles County. Pursuant to the requirements of Los Angeles Regional Water Quality Control Board Resolution 66-49 of September 21, 1966, an environmental sampling station has been established in Bell Creek Canyon approximately 3.4 miles downstream from the south North American Rockwell Corporation boundary. Samples, obtained and analyzed monthly, include stream bed mud, vegetation, and water. Average radioactivity concentrations in Rocketdyne reservoir and Bell Creek samples are presented in Table IV.

TABLE IV

BELL CREEK AND ROCKETDYNE PFL RESERVOIR
RADIOACTIVITY DATA

	1967			First Half - 1968		
Sample Description	No. Samples	α	βγ	No. Samples	α	βΥ
Bell Creek Mud (pCi/gram)	12	0.40	24	5	0.31	23
Bell Creek Vegetation (pCi/gram-ash)	12	0.37 to 0.38	180	5	0.35	171
Bell Creek Water (pCi/liter)	12	0.06 to 0.08	5.7 to 5.9	5	0.07	4.3
Reservoir Station 6 Water (pCi/liter)	12	0.19	6.6	6	0.26	7.1
Reservoir Station 12 Water (pCi/liter)	10	0.16 to 0.17	7.0	6	0.58	8.4

Soil, vegetation, and water are sampled monthly at the Chatsworth Reservoir, which is owned and operated by the Los Angeles City Department of Water and Power. Soil and vegetation radioactivity data for the reservoir are averaged into the off-site data presented in Tables I and II. Normally, one water sample is obtained from the lake surface and another obtained from the reservoir water supply inlet located on the north side of the lake. The average radioactivity concentration in reservoir surface and supply water is presented in Table V.

TABLE V

CHATSWORTH RESERVOIR WATER RADIOACTIVITY DATA

		196	7	First Half	-1968
Sample Type	Activity	No. Samples	Average pCi/liter	No. Samples	Average pCi/liter
Lake	α	12	0.31	6	0.42
Surface	βΥ	12	8.1	6	7.9
Supply	α	12	0.28	6	0.15
Inlet	βΥ	12	6.0	6	4.5

Environmental air sampling for long-lived particulate radioactivity is performed continuously at both the Headquarters and NDFL sites. Air is drawn through a filter which is analyzed, after a 72-hour decay period, for long-lived radioactivity. The average concentration of long-lived beta-gamma radioactivity is presented in Table VI.

TABLE VI

AIRBORNE RADIOACTIVITY DATA

		1967		First Half - 1968		
Location Activity No. Samples		Average pCi/m³	No. Samples	Average pCi/m3		
Headquarters	βΥ	712	0.38 to 0.40	301	0.48	
NDFL	βΥ	21,00	0.40 to 0.41	1062	0.47	

Some of the data presented in the Tables are presented as a range within which lies the true average. This is necessary when one or more of the samples contains an "undetectable" amount of radioactivity. In these instances, two values are determined. The lowest value assumes that the "undetectable" samples contain no radioactivity; the highest value assumes that these samples contain radioactivity equal to the appropriate minimum detection limit specified in Table VIII.

Table I shows that for the first six months of 1968 soil alpha radioactivity increased slightly in all areas, and that on-site soil beta-gamma radioactivity decreased and that off-site soil beta-gamma radioactivity increased slightly. Table II shows decreases in vegetation alpha and beta-gamma radioactivity, with the exception of off-site alpha radioactivity which increased moderately. Table III shows that NDFL process water alpha radioactivity increased and that beta-gamma radioactivity decreased slightly. Table IV shows decreases in Bell Creek mud, vegetation, and water radioactivity, while reservoir stations 6 and 12 show radioactivity increases. Table V shows a moderate increase in Chatsworth Reservoir surface water alpha radioactivity and decreases in surface water beta-gamma radioactivity. Supply inlet water radioactivity decreased. Table VI shows moderate increases in airborne radioactivity for all sampling stations over the 1967 average value. This increase, and the increases discussed above for the preceding Tables is not attributed to Atomics International's operations; rather it is felt to have been produced after September 1, 1961, by several world-wide nuclear detonations and also due to natural causes.

II. ENVIRONMENTAL MONITORING PROGRAM

A. GENERAL DESCRIPTION

Soil and vegetation collection and analysis for radioactivity was initiated in 1952 in the Downey, California area where the Company was initially located. Environmental sampling was subsequently extended to the proposed Sodium Reactor Experiment (SRE) site in the Simi Hills in May of 1954. In addition, sampling was conducted in the Burro Flat

area, southwest of SRE, where many nuclear installations are currently in operation. The Downey area survey was terminated when the Company relocated to Canoga Park. The primary purpose of the environmental monitoring program is to survey environmental radioactivity adequately to ensure that Atomics International operations do not contribute significantly to environmental radioactivity.

A study of past data showed that this purpose could be achieved with a less extensive environmental monitoring program than that which existed until July, 1964. Therefore, beginning with that month, the number of sampling stations was reduced considerably. In addition, since January, 1966, off-site environmental survey samples have been analyzed only quarterly; on-site samples continue to be analyzed monthly. The locations of sampling stations are shown in Figures 4, 5, 6, and 7, and in Table VII.


B. SAMPLING AND SAMPLE PREPARATION METHODS SOIL

Surface soil types available for sampling range from decomposed granite to clay and loam. Samples are taken from the top 1/2-inch layer of ground surface. The soil samples are packaged and sealed in plastic containers and returned to the laboratory for analysis.

Sample preparation consists of transferring the soils to pyrex beakers and drying in a muffle furnace at approximately 500° C for eight hours. After cooling, the soil is sieved to obtain uniform particle size. One-gram aliquots of the sieved soil are weighed and transferred to stainless-steel planchets. The soil is wetted in the planchet with acetone, agitated to obtain uniform sample thickness, re-dried, and counted.

VEGETATION

Vegetation samples obtained in the field are of the same plant type wherever possible, generally sunflower or wild tobacco leaves. These types maintain a more active growth rate during the dry season than does most natural vegetation indigenous to the local area. Vegetation leaves are stripped from plants and sealed in ice cream cartons for transfer to the laboratory for analysis. Plant root systems are not normally analyzed.

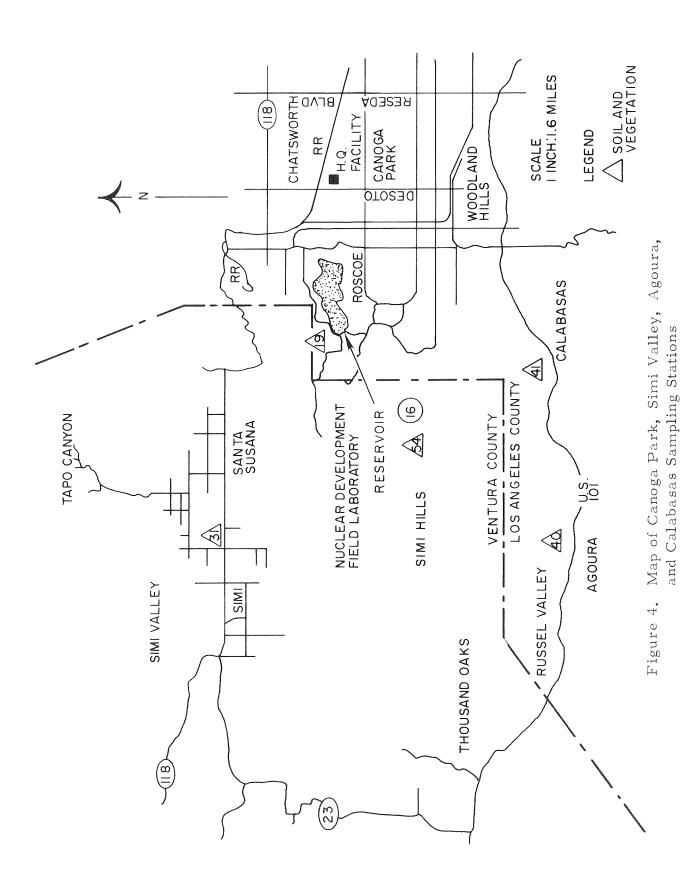

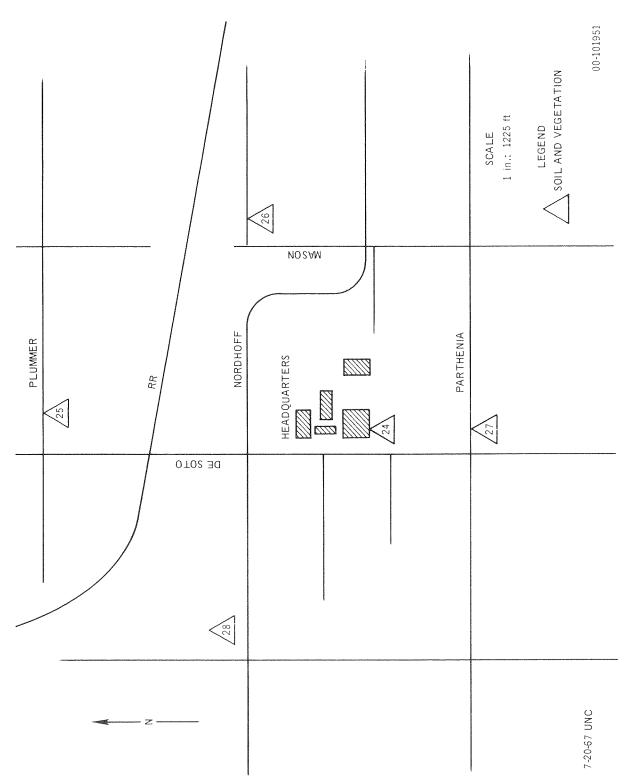


Figure 5. Map of Headquarters Vicinity Sampling Stations

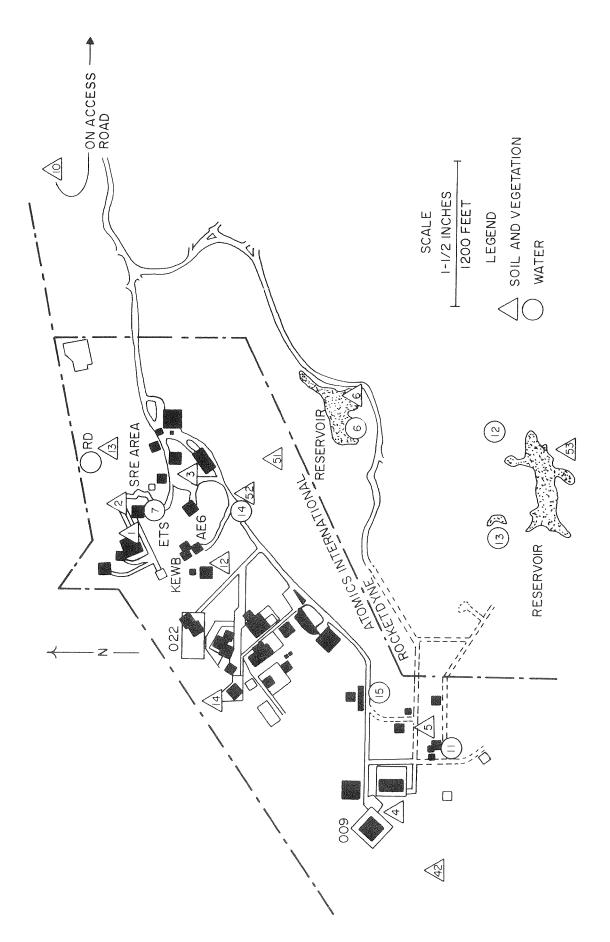


Figure 6. Map of NDFL Sampling Stations

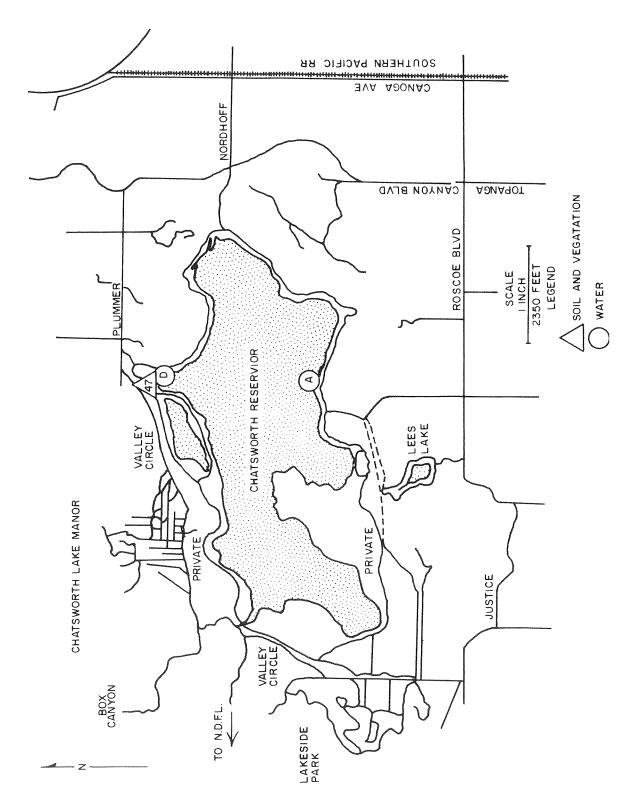


Figure 7. Map of Chatsworth Reservoir Sampling Stations

TABLE VII

SAMPLE STATION LOCATIONS

STATION LOCATION		
CW. 7	SRE Reactor, NDFL	
SV-l	SRE Perimeter Drainage Ditch, NDFL	
SV-2	Bldg. 064 Parking Lot, NDFL	
S V- 3	Bldg. 020, NDFL	
SV-24		
S V- 5	Bldg. 363, NDFL	
s v- 6	Rocketdyne Reservoir, PFL	
SV-10	Santa Susana Site Access Road	
S V- 12	KEWB Reactor, NDFL	
SV-13	Sodium Cleaning Pad, NDFL	
SV-14	Canyon Below Bldg. 022, NDFL	
S V-1 9	Santa Susana Site Entrance, Woolsey Canyon	
SV-24	Atomics International Headquarters	
SV-25	DeSoto Ave. and Plummer St.	
s v- 26	Nordhoff St. and Mason Ave.	
s v- 27	DeSoto Ave. and Parthenia St.	
s v- 28	Canoga Ave. and Nordhoff St.	
SV-31	Simi Valley, Los Angeles Ave. and Sycamore Road	
SV-40	Agoura	
SV-41	Calabasas	
SV-42	Non-Radioactive Materials Disposal Area, NDFL	
SV-47	Chatsworth Reservoir, North Side	
SV-51	Bldg. 029, NDFL	
s v- 52	Burro Flat Drainage Control Pond, G. St. and 17th St., NDFL	
S V −53	Top of Bell Canyon Below Rocketdyne Delta Pond Spillway, PFL	
SV-54	Bell Creek	
W-6	Rocketdyne Reservoir, PFL	
Mose 7	Process Water From Bldg. 003, NDFL	
W-11	Process Water From Bldg. 363, NDFL	
W-12	Rocketdyne Reservoir, PFL	

Burro Flat Drainage Control Pond, G. St., and 17th St., NDFL W-15 Burro Flat Drainage Channel Adjacent to Bldg. 383 W-16 Bell Creek W-A Chatsworth Reservoir Surface, South Side W-D Chatsworth Reservoir, Supply Inlet W-RD SRE Retention Dam, NDFL

Vegetation samples are first washed with tap water to remove foreign matter, and then thoroughly rinsed with distilled water. Washed vegetation is placed in porcelain crucibles and ashed in a muffle furnace at approximately 500°C for eight hours, producing a completely burned ash. Three hundred milligram aliquots of pulverized ash from each crucible are weighed and transferred to stainless-steel planchets for counting.

WATER

Samples of process water are obtained monthly at the NDFL, from Bell Creek, and from the Chatsworth Reservoir. The water is drawn into one-liter polyethylene bottles and transferred to the laboratory.

Five hundred ml. of water are evaporated to dryness in crystallizing dishes at approximately 90°C. The residue salts are transferred to stainless-steel planchets, wetted with distilled water to produce a uniform sample distribution, re-dried under infra-red lamps, and counted.

AIR

Environmental air sampling is conducted continuously at the Headquarters and NDFL sites with automatic air samplers operating on 24-hour sampling cycles. Airborne particulate radioactivity is collected on HV-70 filter paper which is automatically changed at the end of each sampling period. The filters are removed from the sampler and counted after the radioactivity has decayed for at least 72 hours. The volume of a typical daily environmental air sample is approximately 20 cubic meters. The minimum detection limit, calculated at 2σ counter background, is on the order of 0.04 pCi/m 3 .

When abnormally high airborne radioactivities are observed, the radioactivity decay data are plotted to determine the presence of short-lived isotopes other than naturally occurring radon, thoron, and daughters. If fall-out is suspected, the decay characteristics are observed. If the radioactivity decays as a function of $t^{-1.2}$, the data curve is extrapolated in order to determine the date of origin. This date is compared with the dates of publicized nuclear detonations to determine if the abnormal airborne radioactivity was caused by such detonations.

A graph of averaged long-lived airborne radioactivity concentrations detected at the Headquarters and NDFL facilities during the first half of 1968 is presented in Figure 8. The graph shows the incidence of comparatively high airborne radioactivity concentration peaks during January, diminishing through April, and with relatively low concentrations during the last two months of the reporting period.


C. COUNTING AND CALIBRATION PROCEDURES

Environmental soil, vegetation, air, and water samples are counted for alpha and beta-gamma radioactivity in automatic proportional counting systems. The sample-detector configuration provides nearly a 2 π geometry. The detector has a thin window and is continually purged with a 90% argon, 10% methane counting gas. A pre-set count mode of operation is used for all samples; however, an overriding pre-set time is also used for alpha counting to prevent the unnecessarily long counting of samples with extremely low activities. The minimum detection limits shown in Table VIII were determined by using typical values for pre-set count, pre-set time, system efficiencies, background count rates (approximately 0.03 cpm α and 12 cpm β γ), and sample size.

TABLE VIII
MINIMUM DETECTION LIMITS

Sample	Activity	Minimum Detection Limits*
Soil	α	0.19 ± 0.038(pCi/gram)
POTT	βγ	6.9 <u>t</u> 1.1 (pCi/gram)
Vegetation	α	0.064 <u>+</u> 0.076 (pCi/gram ash)
Aegerarion	βγ	13.8 ± 2.1 (pCi/gram ash)
Water	α	0.038 <u>+</u> 0.046 (pCi/liter)
Water	βγ	2.5 ± 1.3 (pCi/liter)

^{*} Standard error

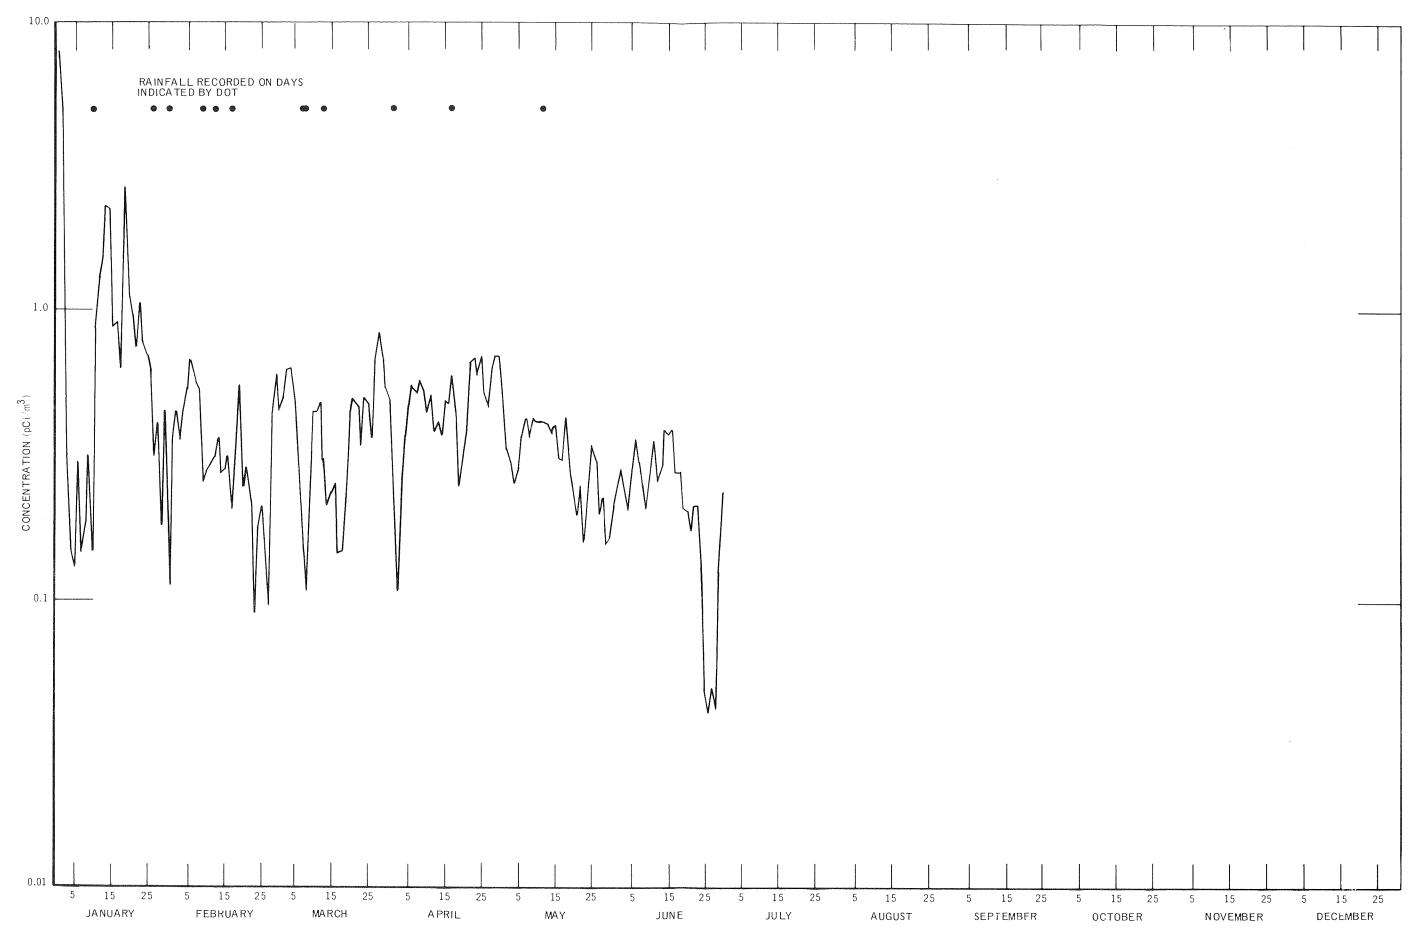

Counting system efficiencies are determined routinely using RaD+E+F (with and without alpha absorbers) and K⁴⁰. Potassium-40, in the form of standard reagent grade KCl, is used to simulate soil and vegetation samples for purposes of calibration. It has a compound specific activity of approximately 830 dpm per gram KCl and a seta energy of 1.33 Mev. Its advantages are purity, long half-life, crystalline form, and low cost. A seeming disadvantage is its beta energy which is somewhat higher than that expected in environmental samples; however, the error introduced by this higher energy has been determined to be insignificant.

In practice, KCl is sieved and divided into aliquots, increasing each in 100-milligram increments from 100 to 1200 milligrams. These aliquots are placed in stainless-steel planchets of the type used for soil and vegetation samples and counted with the proportional counting system. The ratio of sample activity to observed net counting rate for each aliquot is plotted as a function of aliquot weight (see Figure 9). The correction factor (ratio) corresponding to each soil or vegetation sample weight is obtained from this graph. The product of the correction factor and the net sample counting rate yields the sample activity (dpm). This method has been proved usable by applying it to variously sized aliquots of uniformly mixed environmental samples and observing that the resultant specific activities fall within the expected statistical counting error.

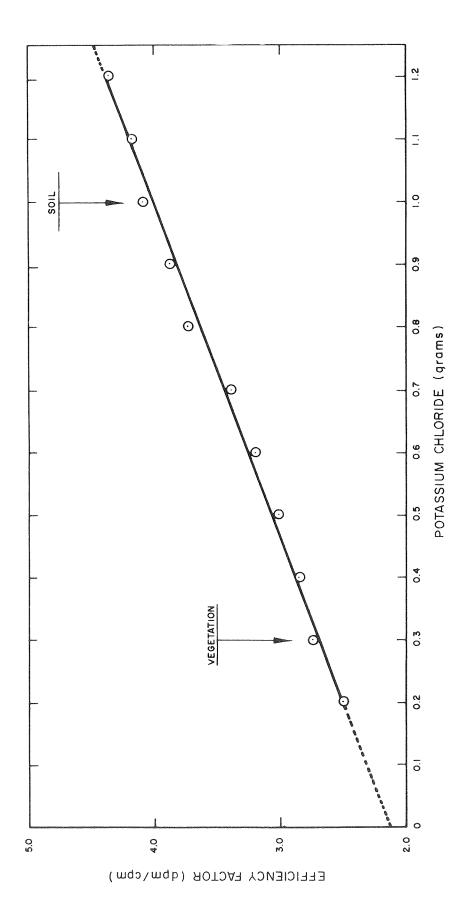


Figure 9. Sample Self-Absorption Correction Graph